

IN THE SPECIFICATION

Please amend pages 1-15 of the specification to read as follows:

FIELD OF THE INVENTION

This invention relates to an aluminum-alloy thermal exchanger, especially for use in air conditioners for cars ~~use for car air conditioner~~. It further relates to an aluminum-alloy thermal exchanger having, on the surface of the aluminum alloy, a hydrophilic with film free from ~~of not containing chromium, and having excellent corrosion resistance and hydrophile property on the surface of the aluminum alloy.~~

RELATED ARTBACK GROUND ART

Up to now, many of thermal exchangers fabricated with aluminum-alloy are designed with the fins close together to place fin closely together in order to enlarge the radiation and cooling area. However, such an arrangement it tends to yield a lot of water condensation ~~drop droplets~~ resulting made from the moisture in the air between the narrowly spaced fins at narrow fin space because the aluminum alloy is hydrophobic. ~~of hydro-phobic property of the alminum alloy which results decrease of~~ As a result, the thermal exchanging efficiency decreases and produces ~~and shows~~ splash in ventilation downstream. In order to prevent such problem, therefore, several countermeasures are proposed to remove water condensation drop droplets from the narrow fin space by giving a hydrophilic hydro-philie property to the surface of the aluminum alloy.

There have been two methods ~~As for the method to give a hydrophilic property hydro-~~ philicity on the surface of aluminum-alloy; ~~there have been two ways;~~ one is to use of a mixed film of organic compound and of alkaline silicate, and another is to use an organic high molecular film. However, both methods result in poor ~~ways are still unsatisfied in order preventing another requirement of~~ corrosion resistance property. A chemical conversion coating operation using chromic acid ~~are~~ is generally carried out on the aluminum alloy in order to improve the corrosion resistance property. However, this method utilizes ~~it includes~~ hexavalent chromium, a substance considered being harmful to the human body. Therefore, a treatment solution free from chromium it is eagerly desired ~~any innovated treatment solution of not containing chromium.~~

JP63-171684A has disclosed a process to form an anti-corrosive and hydrophilic ~~hydro-philic~~ film on the surface of an aluminum alloy by using a synthetic resin of a specific monomer. This film ~~It is, however, unsatisfactory about its hydro-philicity~~ has low hydrophilicity.

JP6-116527A discloses ~~has disclosed~~ a process to give a hydrophilicity ~~hydro-philicity~~ on to an aluminum material surface. However, this method is insufficient to eliminate odor due to its inorganic component.

Further, JP1-270977A discloses ~~has disclosed~~ a method to make aluminum alloy ~~of hydro-philic~~ both hydrophilic and corrosion resistant ~~resistance~~. However, it is not desirable to use a film of this method since it contains chromium compound.

Thus, there is still nothing developed for an aluminum-alloy thermal exchanger with a hydrphobic film being excellent in both corrosion resistance and free from chromium compounds in ~~hydro-philicity and not containing cromium compound.~~

DISCLOSURE SUMMARY OF THE INVENTION

This invention is provided for resolution of problems of ~~against~~ the existing techniques as above mentioned. Namely, it is the purpose of this invention to provide a new aluminum alloy thermal exchanger which has excellent corrosion resistance and hydrophilicity ~~hydro-philicity~~, resolving the problems such as reduction of thermal exchanging efficiency and splash from the condensed ~~condensated~~ water drops, odor exhalation ~~elimination~~, and of course resolving the problem of harmful chromium.

As the result of various considerations to resolve the above problems, the present inventors found ~~the~~ a way of ~~two-steps~~ two-step coating on aluminum-alloy; the first step is a chemical conversion coating of specific vanadium compound with inorganic zirconium compound, and the second step is an organic-inorganic composite film ~~comprizing~~ comprising specific polyvinyl-alcohol polymers ~~polymer~~, specific polyoxyethylene glycol, and mixture of vanadium ~~compound~~ and zirconium compounds ~~compound~~.

According to the ~~The~~ present invention, is the aluminum alloy of the thermal exchanger ~~being characterized in that the aluminum alloy has the~~ a first protective layer of chemical conversion coating ~~being~~ produced by using ~~the~~ a treatment liquid containing (a) and (b) explained below on the surface of the aluminum alloy, and ~~it further has the~~ a second protective layer of ~~hydro-philic~~ a hydrphilic film ~~being~~ produced by adding ~~the~~ a treatment liquid containing (c), (d), (e), (f), as described below, wherein ~~and~~ the weight of zirconium in (f) is 40 350 % ~~to~~ of the weight of

vanadium in (e), and then drying.

Components (a) - (f) are as follows:

- (a) water soluble vanadium compound,
- (b) fluoro zirconium compound,
- (c) aqueous polyvinyl alcohol polymer having vinyl alcohol unit of more than 40 mol % and additional polymerization unit (other than the vinyl alcohol unit of above) of less than 60 mol %,
- (d) polyoxyethylene glycol of 6,000 1,000,000 in average molecular weight,
- (e) vanadium compound, and
- (f) zirconium compound.

DETAILED DESCRIPTION

~~Details of this invention are described.~~ An aluminum-alloy thermal exchanger of this invention has the first protective layer of a chemical conversion film and the second protective layer of a hydrophilic ~~hydro-philic~~ film on the surface of the aluminum-alloy.

The first protective layer is built up on the surface of said aluminum-alloy, through chemical conversion treatment using a treatment liquid containing (a) water-soluble vanadium compound and (b) fluoro-zirconium complex compound.

As for water-soluble vanadium compound (a), it is preferable to apply organic vanadium complex compound being selected from the inorganic vanadium compounds such as meta-vanadic acid and vanadic acid and their salts salt of either sodium, potassium, or ammonium, vanadium sulfate, vanadyl sulfate, vanadium nitrate, and vanadium acetate, and also from the organic vanadium complex compounds such as vanadium acetyl-acetonate, and vanadyl acetyl-acetonate. For the above mentioned water soluble vanadium compound (a), it is more desirable to use the organic vanadium complex compound.

For fluoro-zirconium complex compound (b), it is preferable to utilize ~~applicable either at~~ least one of zirconium hydrofluoride, zirconium-ammonium fluoride, and zirconium-potassium fluoride.

There is no limitation on blending ratio of (a) and (b) compounds into the treatment liquid.

The first protective layer is, as above mentioned, complex chemical conversion film, containing vanadium and zirconium. Fluoro-zirconium complex compound may ~~be considered to~~ precipitate and ~~to~~ form a frame work of oxide or fluoride on the surface of the aluminum-alloy, and the frame work may insulate the surface from corrosive matter. Thus, white-rust resistance is given


by zirconium, while the vanadium gives to the aluminum alloy a resistance against pitting corrosion. As result of these composite effects, it is deemed that the first protective layer contributes to an excellent corrosion resistance without chromium.

In this invention, for the first protective layer, the film weight is preferable at 10 2000 mg/m, and more preferable at 50 500 mg/m. ~~In case~~ When the film weight is less than 10 mg/m, it becomes insufficient on adhesion with the second protective layer and becomes less corrosion resistant, while ~~in case a film weight of more than 2000 mg/m saturates it result not only to saturate the effect but also to lead the~~ increases the cost expensive. Further, when the film weight exceeds 2000 mg/m, ~~it the appearance becomes less uniform, in film appearance and it arises a bad odor emanates from the second protective layer, so it is better to control the film weight being not more than 2000 mg/m.~~

The vanadium amount in the first protective layer ~~is preferably~~ may be preferable at 2 500 mg/m, and more ~~preferably preferable~~ at 10 300 mg/m. When the amount is below 2 mg/m, a decrease in pitting corrosion resistance may be observed ~~become to decrease~~. The zirconium amount may be preferable at 2 500 mg/m, and more preferable at 10 300 mg/m. When the amount is below 2 mg/m, corrosion resistance against white rust may ~~become to decrease~~. However, when each of them are ~~become~~ over 500 mg/m, it may become costly and may cause ~~arise~~ a bad odor.

The first protective layer of aluminum-alloy thermal exchanger in this invention is covered by the second protective layer. This second protective layer is built up by using the treatment liquid containing (c),(d),(e) and (f) as explained below. (c) is aqueous polyvinyl alcohol polymer having vinyl-alcohol unit of more than 40 mol% and additional polymerization unit (other than the vinyl-alcohol unit of above) of less than 60 mol%. (d) is polyoxyethylene glycol of 6,000 1,000,000 in average molecular weight, (e) is vanadium compound and (f) is zirconium compound. And the weight ratio of zirconium in the compound (f) to vanadium in the compound (e) is 40 350 %.

Formula (I) below shows example of polyvinyl alcohol polymer (c) explained above, and it may also be another denatured polymer obtainable as a reaction product between the polyvinyl-alcohol polymer (I) and diketene.

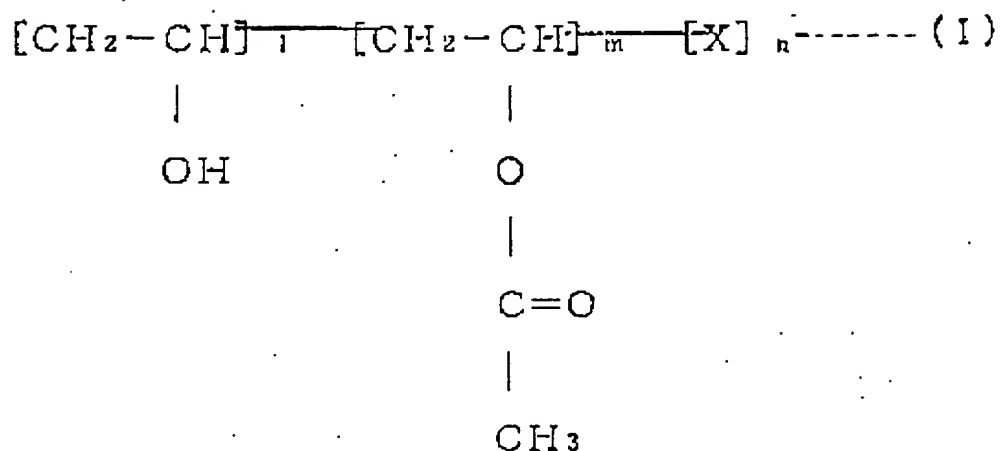

In The polyvinyl-alcohol polymer shown in formula (I), it may include either partial or entire saponificated compounds of poly-vinyl acetate and any copolymers of polyvinyl acetate with other monomer, and there is no limitation in to the kind of co-monomer to be copolymerized with vinyl acetate.

In polyvinyl-alcohol compound shown in formula (I), "X" indicates a copolymer being different from vinyl-acetate and vinyl-alcohol and "l", "m", and "n" indicate indicates molecular number of vinyl-alcohol unit, vinyl-acetate unit, and additional polymer unit other than vinyl-acetate, respectively. In formula (I), $[\{n / (1 + m + n)\} \times 100]$ is desirable to be below 40 mole %, and more desirable to be below 30 mole %.. Also, in the polyvinyl-alcohol polymer shown in formula (I), $[\{m / (1 + m + n)\} \times 100]$ is desirable to be below 20 mole %, and more desirable to be below 10 mole %.. ~~In case of excessive A higher mole ratio of the above,~~ it may reduce water-solubility of the polyvinyl-alcohol. Regarding a value of $[\{1 / (1 + m + n)\} \times 100]$, it may results result as 40 100 mole % from both values of above.

Hydroxyl group in polyvinyl-alcohol polymer (c) may give to the second protective layer a water-proof property after a cross linking reaction with an additional copolymer unit and zirconium. And hydroxyl group Hydroxyl groups not participated by such reaction gives hydrophilic give a hydrophile properties to the second protective layer.

For polyoxyethylene glycol (d) of the second protective layer, the weight average molecular weight is desirable between 6,000 1,000,000. The ~~above~~ polyoxyethylene glycol (d) becomes immobilized in the second protective layer by formation of polymeric complex compound with zirconium ion in the zirconium compound (f), and may produce ~~show~~ odor-preventing properties and hydropohilic ~~hydrophile~~ properties.

When ~~In case~~ the weight average molecular weight of the polyoxyethylene glycol (d) is below 6,000, immobility in the second protective layer may decrease under wet conditions ~~condition~~, resulting in diminished and a durable time of good odor-preventing properties and of good ~~hydrophile~~ hydrophilic properties over time ~~may decrease~~. When ~~While in case~~ the weight average molecular weight is over 1,000,000, the cost of producing the treatment liquid increases ~~it becomes cost up for production of treatment liquid~~ since it becomes difficult for the treatment liquid ~~itself~~ to dissolve into the water.

As for the vanadium compound (e) of the second protective layer in this invention, many sort of inorganic and organic vanadium compounds of any vanadium valence may be used, but it is more preferable to use tetravalent or pentavalent vanadium. Inorganic vanadium compounds such as meta-vanadic acid and vanadic acid and their salts ~~salt~~ of sodium, potassium, or ammonium, vanadium pentoxide, vanadium sulfate, vanadyl sulfate, vanadium nitrate, vanadyl nitrate, vanadium acetate and vanadium phosphate may be used. Also organic vanadium compounds such as vanadium acetyl-acetonate and vanadyl acetyl-acetonate may be used.

Vanadium in the second protective layer shows properties of resisting against pitting corrosion like the vanadium in the first protective layer. The effectiveness of vanadium is observed ~~deemed~~ with a self-remedy-process, which is similar to chromate film. When a part of aluminum alloy may be corroded, vanadium may move from the film to the corroded portion and may form there a new strong film again and isolate the aluminum alloy from the corrosive matter. It is also believed ~~deemed~~ that it may produce some compounds in the second protective layer ~~being difficult to~~ which do not easily dissolve in water, together with zirconium as mentioned later.

As for the zirconium compound (f) in the second protective layer in this invention, following agent such as zirconium-ammonium carbonate, zirconium-potassium carbonate, zirconyl nitrate, zirconyl sulfate, zirconyl acetate, zircon hydrofluoric acid and ~~its salt~~ their salts may be used.

Zirconium in the second protective layer shows white-rust resistant effect ~~similarly~~ similar to the process of zirconium in the first protective layer by isolating the surface of aluminum alloy from external corrosive matter by formation of frame work through cross-linking process between

zirconium and hydroxyl group in polyvinyl-alcohol polymer (c).

Also, zirconium has a role of building up some water insoluble compounds ~~compound~~ with vanadium, making vanadium difficult to dissolve. For weight ratio of zirconium to vanadium, it is preferable between 40 350 %. When the weight ratio falls ~~In case~~ below 40 %, vanadium may decrease its durability time of corrosion resistance. When the weight ratio is ~~While in case~~ over 350 %, it demerits economically. When the content of polyvinyl alcohol polymer (c) is 100 weight ratio in the treatment solution for the second protective layer in this invention, it may be preferable that the polyoxyethelene glycol (d) may be at 10 1000 weight ratio, vanadium compound (e) may be at 1 200 weight ratio in vanadium-ion and zirconium compound (f) may be at 0.4 700 weight ratio in zirconium-ion.

Further, ~~for the second protective layer in this invention,~~ it may include another additives (g), such as an anti-microbial agent and mildew-preventing agent, cross-linking agent such as aqueous epoxy resin and surface-active agent in the allowable amount of not impairing the primary effect.

Anti-microbial agents ~~agent~~ and mildew preventing agents ~~may agent~~ ~~which are to be added~~ to prevent foul odor from the bacteria's propagation of bacteria. The decomposition temperature of the anti-microbial agent and mildew-preventing agent is desirable to be at 100 , and more preferable to be at 150 in order to keep its effect to the ~~said~~ temperature.

The ~~contained~~ combined weight of the anti-microbial agent and mildew preventing agent is desirable at 0.1 70 wt% to the total weight of (c) (d) of the second protective layer, and more preferable at 0.5 30 wt % and further more preferable at 0.5 30 wt %. ~~In case~~ When the combined weight is below 0.1 wt%, it the effect becomes insufficient ~~on effect~~, while exceeding 70 wt% it degrades the water proof property of the film .

In this invention, a cross linking agent is added in order to make the second protective layer ~~to be~~ a three dimensional structure through reaction with hydroxyl group in polyvinyl alcohol aqueous polymer (c) or with terminal hydroxyl group in polyoxyethelene glycol (d). It is desirable to use aldehyde as the cross-linking agent, such as polyglycidyl compound, blocking isocyanate, polymethylol compound and glyoxal. ~~These~~ The addition of a cross linking agent may increase ~~more~~ water proof properties on the second protective layer. The content of the cross-linking agent is desirable at 0.1 70 wt% ~~to of~~ the total content of (c) (d) ~~In case~~ When the contents of the cross-linking agent is below 0.1 % wt%, it becomes insufficient the cross-linking effect becomes insufficient, while exceeding 70 wt %, it is not desirable, ~~as for weakening of film adhesion~~ weakens.

Many sort of surfactants ~~surfactant~~ may be added in order to ~~make~~ smooth the surface of the second protective layer. The content is preferable to be at 0.1 70 wt% to the total content of (c) (d), and more preferable at 0.3 50 wt %, and further more preferable at 0.5 30 wt%. ~~In case~~ When the surfactant content is below 0.1 % wt %, it is difficult to obtain a clear effect, while exceeding 70 wt % ~~it~~ degrades the water proof property of the film.

It is preferable that the film weight of the second protective layer in this invention ~~may be at~~ is 30 5000 mg/m , and more preferable at 40 3500 mg/m , and further more preferable at 50 2500 mg/m . ~~In case~~ When the film weight is below 30 mg/m , corrosion resistance, ~~hydrophile~~ hydrophilic properties and odor-preventing properties become insufficient, while exceeding 5000 mg/m may be wasteful.

It is preferable that the content of the vanadium compound in the second protective layer ~~may be at~~ is 2 500 mg/m being calculated in vanadium element, and more preferable to be at 2 250 mg/m in vanadium element. Also zirconium compound may preferably be ~~contained at~~ 1 1750 mg/m being calculated in zirconium element, and is more preferable to be 1 875 mg/m , wherein the weight ratio of zirconium to vanadium should be at 40 350 %. ~~In case when~~ When vanadium is below 2 mg/m or zirconium is below 1 mg/m , the corrosion resistance may ~~be decrease~~ decreased, however when vanadium exceeds 250 mg/m or zirconium exceeds 1750 mg/m , it may be wasteful.

~~It is~~ Now will be described the film formation method in this invention. First, the surface of the aluminum-alloy thermal exchanger is chemically cleaned by using alkali cleaner or acid cleaner. Subsequently, the first protective layer is formed on the surface of the thermal exchanger through chemical conversion coating. And then it is coated with the treatment liquid containing (c) (f) and other ~~addilives~~ additives in order to form the second protective layer. ~~Many~~ Any coating method may be utilized ~~applied~~, however, ~~it is generally used~~ dipping is the general method. After coating, it is preferable to dry ~~it the film~~ under at a hot blast of 80 250 and more preferably of 100 200

~~Embodiment~~ Embodiment Example And Comparative Example

Aluminum alloy thermal exchanger of ~~embodiment~~ embodiment examples 1 9 and comparative examples 1 9 were used as specimens. After cleaning the surface, the first protective layer and the second protective layer were formed ~~farmed~~. And then tests were carried on the specimens. However, for the anti-microbial test, Al-Mn alloy sheets (JIS-A3004) of 70mm×150mm×0.2mm were used.

(1) Surface cleaning:

All specimens were cleaned by dipping into 3 wt% water solution of alkali degreasing agent (Fine Cleaner 315 ; Nihon Parkerising Co.Ltd.) maintained at 60 and kept for 90 seconds in order to remove such as grease away from the surface, and rinsed with fresh water. Then, the specimens were dipped into 10 wt% of 10 % sulfuric acid at room temperature for 90 seconds, and rinsed with fresh water.

(2) Formation of the first protective layer of ~~embodiment~~ embodiment examples:

The treatment solution used in formation of the first protective layer of the ~~embodiment~~ embodiment examples are shown in Table 1. And the treatment solutions used in formation of the first protective layer of the comparative examples are shown in Table 2. The following shows the agents ~~Followings are showing the agent~~ used in (a)- (a)- and (b)- (b)- of Table 1 and 2.

(a) Water soluble vanadium compound

- vanadyl-acethylacetate $[(C H O) VO]$
- vanadium-acethylacetate $[(C H O) V]$
- meta-vanadic acid ammonium $[(NH) VO]$

(b) Fluoro-zirconium complex compound

- zirconium hydrofluoride $[H ZrF]$
- zirconium-ammonium fluoride $[(NH) ZrF]$

(3) Formation of the first protective layer of comparative examples

- Fluoro zirconium complex compound (b) ~~were~~ was not used in comparative example 1 and 3.
- Water soluble vanadium compound (a) was not used in comparative example 2.
- Zirconium phosphate is applied for the first protective layer instead of the present invention in comparative example 9.

(4) Formation of the second protective layer

After the formation of the first protective film, the specimens were dipped into the treatment solution in order to form the second protective film. Then, the specimens were dried for 30 minutes in 150 . The composition of the element in the second protective film are shown in Table 1 and Table 2. The following shows the agents ~~is the agent~~ used in (c)- (c)- , (d)- (d)- , (e)- (e)- , (f)- (f)- and (g) of Table 1 and Table 2.

(c) polyvinyl-alcohol polymer

- saponificated polyvinyl alcohol

(saponification degree: 90 mol%, molecular weight: 100 thousand)

- 5 mol% diketene treated polyvinyl alcohol (saponification degree: 90 mol%, molecular weight: 50 thousand)

(d) polyoxyethylene glycol

- polyethylene glycol 20000 (average molecular weight: 20 thousand)

- polyethylene oxide (average molecular weight: 300 thousand)

(e) vanadium compound

- sodium meta vanadate [NaVO]

- ammonium meta vanadate [NH VO]

(f) zirconium compound

- zirconium hydrofluoride [H ZrF]

- zirconium-ammonium fluoride [(NH) ZrF]

- zirconium ammonium carbonate [(NH) Zr(CO)]

(g) additives (anti-microbial agent)

- sodium-2-pyridine-thiol-1-oxide

(cross-linking agent)

- glycerol diglycidyl ether (aqueous epoxy cross-linking resin, surface active agent)

- polyoxyethylenealcohol ether (non-ionic surfactant, HLB=12)

(5) Test and evaluation

The results of the test are explained in Table 1 Table 4.

(Weight film)

~~It was measured~~ Measured by using a fluorescent X-ray analyzer and a surface carbon analyzer.

(corrosion resistance)

The salt spray test tests according to JID-Z-2371 were carried out for 24 hr, and observed the white rust occurrence at the fin of the thermal exchanger.

: no white rust

○ : white rust area below 10 %

△ : white rust area below 10 30 %

× : white rust area over 30 %

(hydrophilic property)

After 72 hours dipping into flowing water at room temperature then 1 hour drying at 80 , the contact angle of the fin portion of thermal exchanger with water was measured (using an image-processing contact-angle meter Type CA-X; Kyowa Surface Chemistry-Co.).

(odor-preventing property)

After 72 hours dipping into flowing water at room temperature then 1 hour drying at 80 , it was examined by smell.

○ : no odor

△ : a little odor

× : clear odor

(anti-microbial property)

Test specimens were dipped for 72 hr into a ~~following~~ flowing water of room temperature, then the specimens were dried for 1 hr at 80 . The specimens were cut into the size of 4 cm×4 cm, then ~~nutrient~~ nutrients and ~~microbe~~ microbes were sprayed on the cut samples, and then they were cultivated for 14 days at 30±2 . The number of extracting ~~microbe~~ microbes from the cultivated mat was measured.

○ : the number of microbes < 10 /m

△ : 10 /m the number of microbes 10 /m

× : the number of microbes 10 /m

Microbes used in test

Microbes : Escherishia coli, Bacillus subtilis, Pseudomanos aeruginosa

Mildew : Aspergillus niger, Penicillium citrinum, Cladosporium clados-porides

As seen from Table 1 and 3, the ~~embodiment~~ embodiments of examples 1 9 of aluminum-alloy thermal exchanger having the first protective layer and the second protective layer of this invention showed excellent corrosion resistance as well as excellent hydro-philicity and odor preventive property.

Whereas in Table 2 and 4, comparative examples 1 3, which did not use vanadium compound (a) or fluoro-zirconium complex compound (b) for the first protective layer, they were inferior in corrosion resistance. In comparative example 4 which did not use aqueous polyvinyl-

alcohol polymer (c), it was seen insufficient in corrosion resistance, ~~hydro-philicity~~ hydrophilicity and odor prevention ~~preventive property~~. In comparative example 5 which did not use polyoxyethylene glycol (d), it was insufficient in ~~hydro-philicity~~ hydrophilicity. Also, in comparative example 6 which did not use vanadium compound (e), it resulted inferior corrosion resistance. In comparative example 7 which did not use zirconium compound (f), it was inferior ~~to~~ in corrosion resistance and to in odor preventive property prevention. Comparative example 8 It was also insufficient in corrosion resistance ~~in comparative example 8~~ where the weight ratio of vanadium to zirconium is below 40 %. Further in comparative example 9 where zirconium phosphate is applied as the first protective layer instead of the present invention, corrosion resistance was unsatisfactory.

ADVANTAGES OF THE INVENTION

According to the formation of the first protective layer and the second protective layer of this invention on the surface of aluminum alloy, it became possible to obtain aluminum-alloy thermal exchanger of not containing any harmful chromium ~~ion~~ ions on its surface and having good corrosion resistance, good hydrophilicity ~~hydro-philicity~~, and excellent long term preventive capacity against ~~odor~~ odor ~~for long term~~.